

2017 COLOUR CHART



WINDOW WHITE 136 - K




WARM WHITE T-400 - G




FACTORY WHITE T-300 - K




CASHMERE - G




IVORY - K



MOCHA - K




WICKER - G




SANDALWOOD - K



PEBBLE - G




DARK DRIFT - G




SADDLE - G




SABLE - G



SMOKE - G



CHOCOLATE - K



COMMERCIAL - K



ESPRESSO



DOVER GRAY - G



SLATE - K



MIDNIGHT - G



IRON ORE - G




FOREST - K



RED



BURGUNDY




BLACK - K

- Window White 136 (Matches Extruded Vinyl Windows - White 136)
- Warm White T-400 (Matches Entry Door Warm White T-400 Extruded Vinyl Jambs & Extruded Vinyl Patio Doors - White 137)
- Factory White T-300 (Matches Entry Door Factory White T-300 Extruded Vinyl Jambs - White 141)
- Colours May Vary Slightly During Production
- Windows Painted Exterior Only - Interior White 136
- Aluminum Match: "G" = Gentek "K" = Kaycan
- Computer Matched Custom Colours Also Available


2017 HAND STAINED FIBERGLASS FINISH




CEDAR CHEST

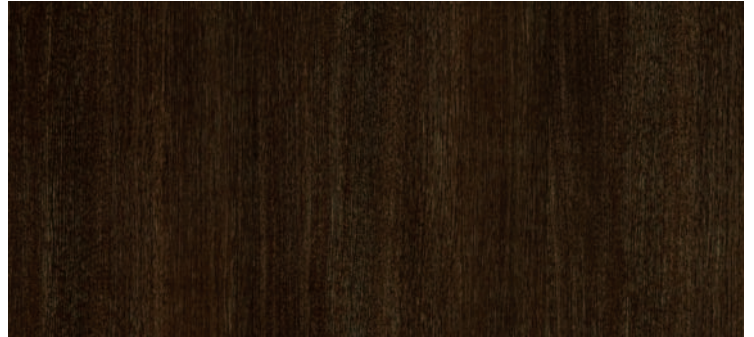


DARK WALNUT

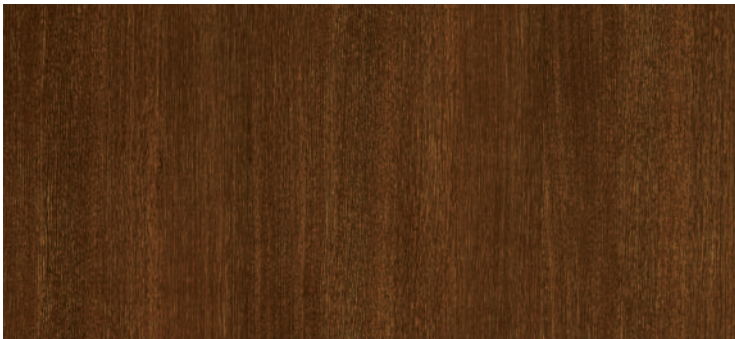

TRADITIONAL CHERRY

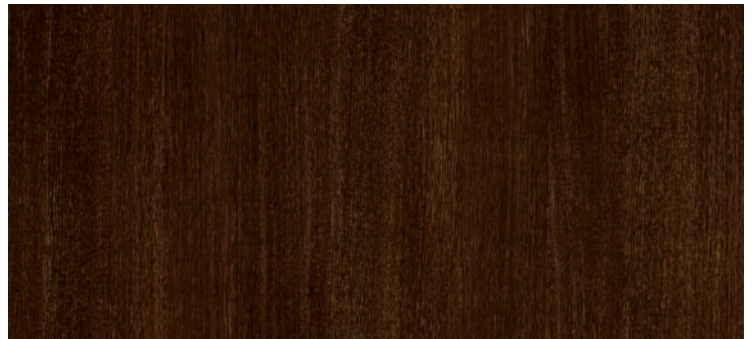


ANTIQUE BROWN

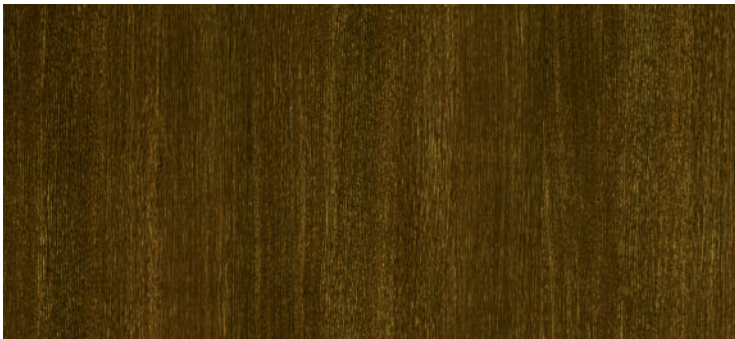


HICKORY



ESPRESSO

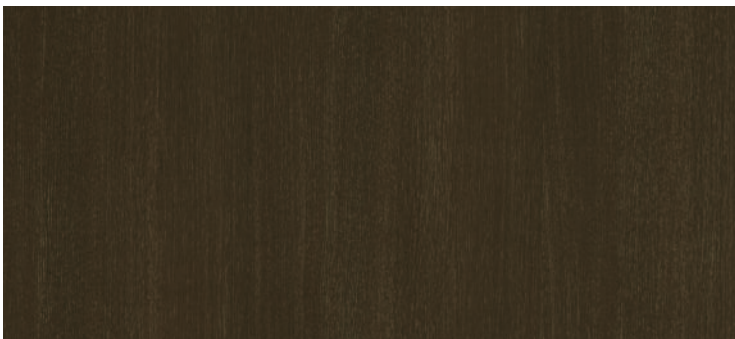

COASTAL GREY

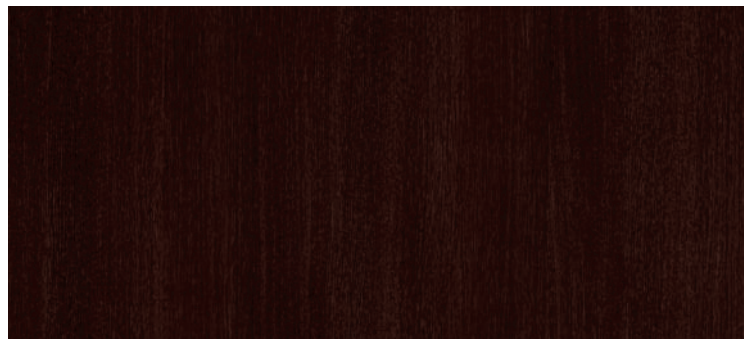

WILD BERRY

HAND STAINED FIBERGLASS FINISH MAY VARY DURING PRODUCTION

Hand Stained Fiberglass Entry Systems

Care & Maintenance

All exterior finishes are affected by exposure and weathering from sun, moisture and air pollutants. Simple, periodic maintenance of the clear coat is required to keep it looking fresh and well protected against the elements. There is no set schedule for reapplication of the clear coat. Exposure dictates how often maintenance is required. See our Vinylguard limited warranty for details. Re-application of the clear coat will renew the protection over the factory stained surface. Following these easy steps listed below will keep your Vinylguard entry door looking fresh.

Steps

- Start by cleaning your Vinylguard entry door with a liquid solution of mild household soap and water, applied with a sponge to wipe off accumulation of surface dirt.
- Rinse well and wipe dry. Make sure the product is completely clean and dry before refinishing.
- It is recommended to use Sikkens Cetol® door and window (high performance translucent finish) satin clear coat.
- No sanding or light scuffing of the surface is required.
- For best results, apply Sikkens with a long haired natural bristle brush over the entire system. It is not recommended to finish small areas at a time.
- Do not apply in direct sunlight, or if rain, snow, heavy dew or low temperatures are expected within 48 hours.
- For best results, apply the clear coat between 15°C to 25°C.
- Allow 48 to 72 hours to fully cure.

It is recommended to follow Sikkens manufactures instructions, prior to application.



Stain samples are provided to give a visual representation of the stain finish and depict the stains grain as accurately as possible. Actual stain colours may vary during production.